

► Assembly Instructions


All components are marked with their name & display number.

At the very least, your shipment will contain:

- **SlatWall**
- **Side Rails (2x)**
- **Feet (2x)**

1. If your display is shipped knocked down, then the fasteners that attach the Side Rails to the SlatWall are already in the SlatWall at the pre-determined locations.
2. The Side Rails are marked left and right if you are facing the front of the display.
3. Attach the two Side Rails to the SlatWall, using the Acorn Nuts (1) and Long Bolts (3)
4. The Feet are marked left & right if you are facing the front of the display.
5. Attach the two Feet to the two Side Rails, using the Acorn Nuts (1) and Short Bolts (2).
6. All wheels are shipped separately. The wheels attach to the feet in place of the Self-Levelers. After attachment, they should be secured with an Acorn Nut (1).

Image	Description
	Side Rail
	Foot
	Self-Leveler

Image	Description	Reference Number
	Acorn Nut	1
	Short Bolt	2
	Long Bolt	3

There are many configurations of the bracing which are based upon your unit's specific size, material, and weight.

Your unit may or may not have all of the bracing pieces shown in the diagram herein. If you need assistance, please do not hesitate to contact us per below.

Helpful Hints

1. Do not over tighten the fasteners.
2. The labels marking each component are for your reference only. After unpacking and assembling the displays for the first time, you may find it necessary to move the labels or remove them altogether. Regardless, we do recommend that some marking system be used to identify each component and to identify which display it belongs to. Each FreeStanding Unit has been individually tested at the factory for fit with its corresponding numbered components.
3. Depending on your aesthetic requirements for the display, you may choose to have the head of the bolts or the acorn nuts be more visible. Either way works.
4. To clean the slatwall, use furniture polish. To clean the support structure use rubbing alcohol and a soft rag (household cleaners may leave a cloudy residue).
5. Use Scotch-Brite pads to polish away scratches on the support structure.
6. Pack the components into their individual plastic bags and bubble wrap to help avoid scratching and damage during transit.

Any questions or problems, please contact us:

DiamondLife
234 Lott Road
Pittsburgh, PA 15235
USA
Ph. 1.888.98.DGEAR (983.4327)
Email. help@diamondlifegear.com
Store. diamondlifegear.com

Doing a common thing uncommonly well,
brings success.


Welcome to the DiamondLife.

DIAMONDLIFE 

► Assembly Instructions

Example Shown:

- Display Size: 6'H x 4'W
- SlatWall Size: 4' x 4'
- Style: Off-the Ground
- Dual-Sided

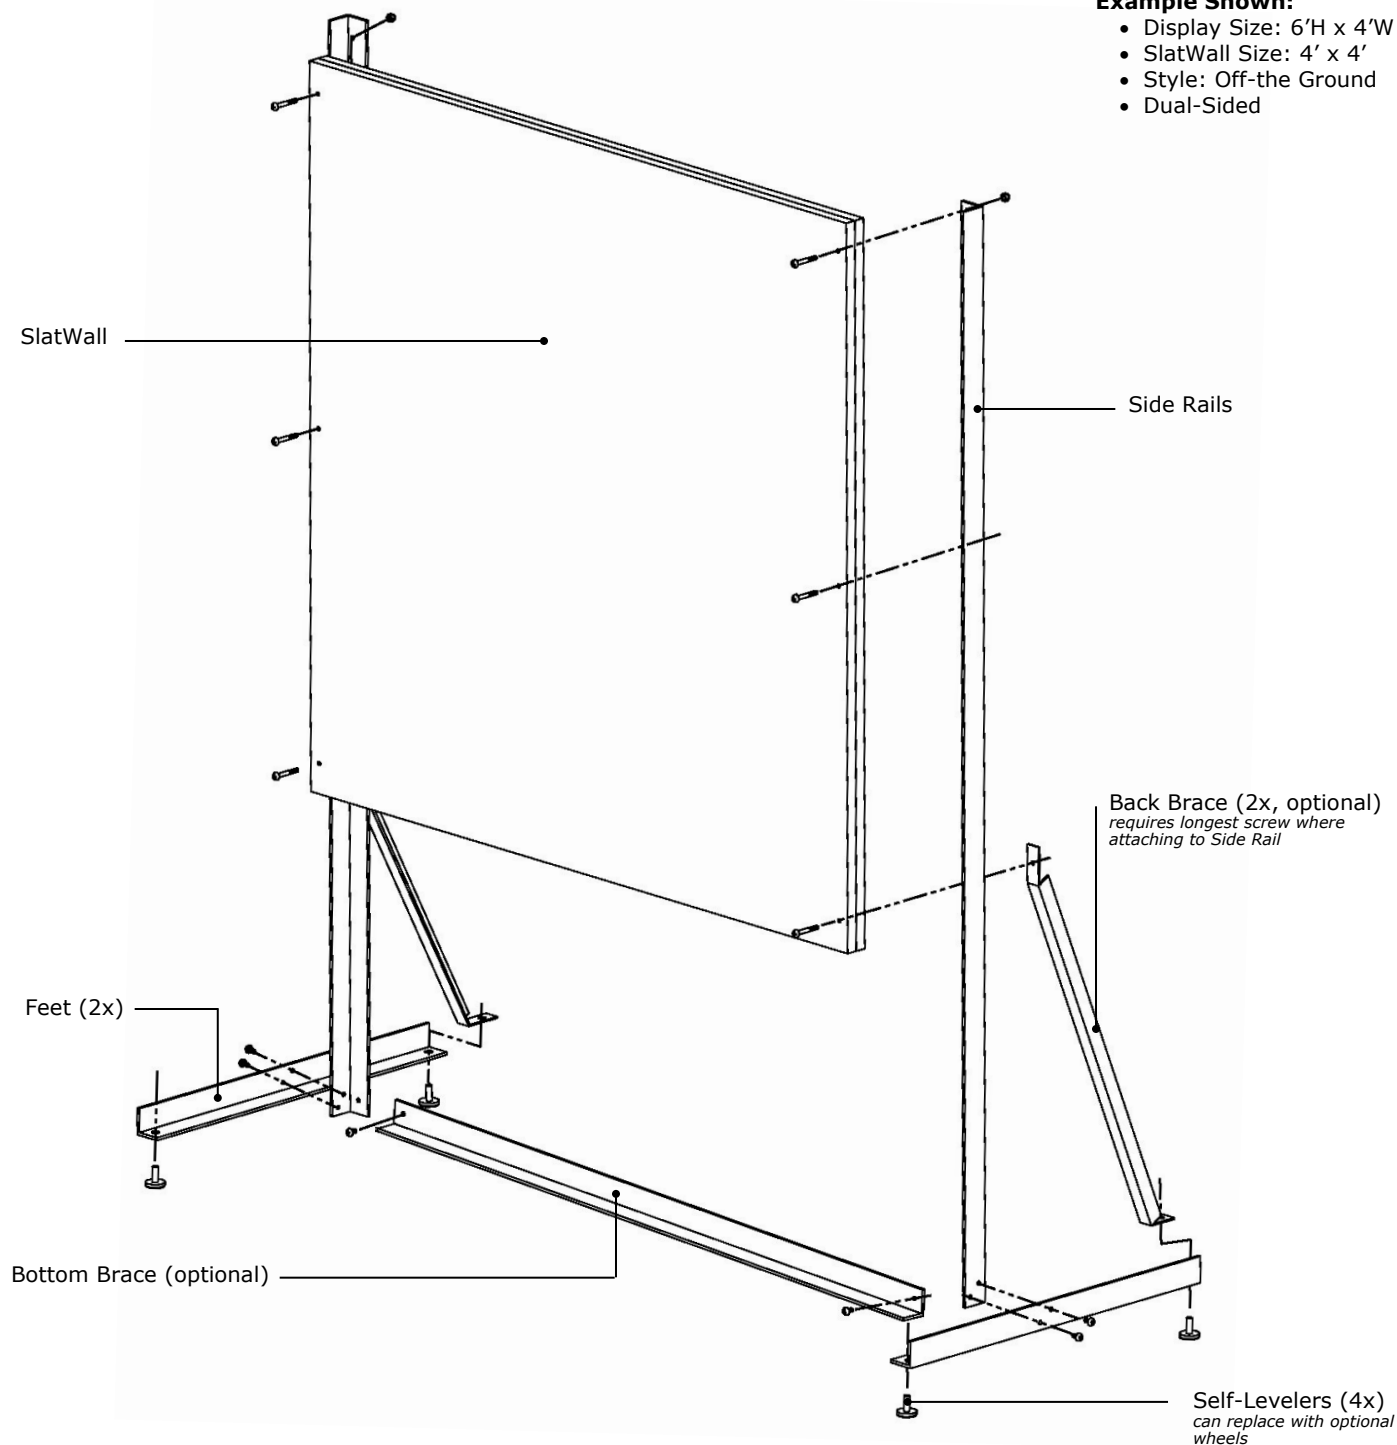

When unpacking your SlatWall MX®, it is normal to see fraying around the grooves. This fraying is the protective plastic film that is on the surface of your slatwall to protect it during manufacturing and transit. The fraying naturally occurs when the grooves are cut into the slatwall. Remember to remove the protective plastic film from the slatwall after installation.

Any questions or problems, please contact us:

DiamondLife
234 Lott Road
Pittsburgh, PA 15235
USA

Ph. 1.888.98.DGEAR (983.4327)
Email. help@diamondlifegear.com
Store. diamondlifegear.com

DIAMONDLIFE